

Safan E-Break 200-4100 (2011)



CNC gesteuerte Servo elektronische Abkantpresse

Maschinendaten:

max. Presskraft 200 to. Max. Biegelänge 4100mm

Matrizen

OZU-051 V8-30 min. 6mm innen
OZU-052 V12-30 min. 9mm innen
OZU-053 V16-30 min. 10mm innen
OZU-054 V24-30 min. 15mm innen
OZU-032 V40-40 min. 26mm innen
OZU-016 V60-60 min. 42mm innen
Radius 10mm Länge 2500mm
Radius 15mm Länge 2500mm
Radius 20mm Länge 2500mm
Radius 30mm Länge 2500mm

Dicke

bis 1,5mm
bis 2mm
bis 3mm
bis 4mm Alu u Stahl




Stempel

BIU-021
BIU-023 (Geissfuss)
BIU-029

INFOS

Kuchenblech ringsum 100mm ohne und 180mm mit Verlängerung bei 90°

Biegeinformationen

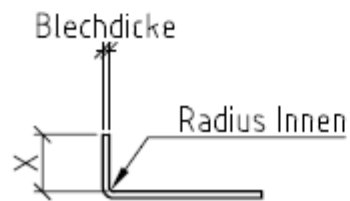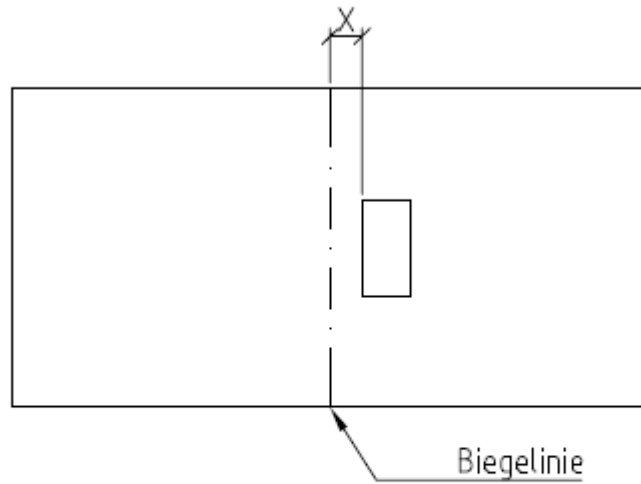

Blechdicke	Mass X	Mass Y	Radius innen
0.8	6	11	1-2mm
1	6	11	
1.5	8	14	
2	10	20	2-3mm
2.5	10	21	
3	15	27	3-4mm
4	25	35	
5	25	37	
6	41	58	5-6mm
8	41	62	8-10mm
10	50	80	11-13mm

Stempel

